

In Section K:

Alarms & Leak Detectors

LP Tanks & Accessories

Valves & Fittings

Regulators

Pigtails & Hoses

OP PRODUCTS DETECT-A-LEAK

Detects leaks in anything that can be tested with air or gas pressure. Just daub on and look for bubbles.

Lined cap and stainless steel applicator prevent rust and sediment build-up. Instantly finds gas and air pressure leaks with a non-corrosive formula and the included 4" dauber.

Gas Leak Detector Fluid:

56875 2-oz. Spray #02176 24

50270 8-oz. Bottle #02126 12

50271 1-Gallon Bottle #02136 4

OP Products, Inc.



CAMCO

CAMCO GAS LEAK DETECTOR


Help protect your RV from gas leaks. Gas Leak detector bubbles at the problem area when gas is escaping. 8-oz. bottle. Dim. (package): 5.75" H x 4.75" W x 9" L.

57613 Gas Leak Detector w/Sprayer, 8-oz. bottle #10324 6



56870

UL SAFE-T-ALERT

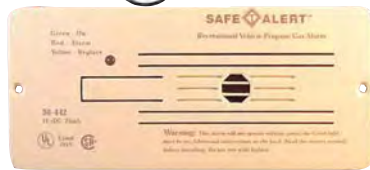

57461

57462




Fits Most Cut Outs for Flush Mount
LP Gas Leak Detectors
Including Fleetwood & Winnnebago's

SAFE-T-ALERT



50001

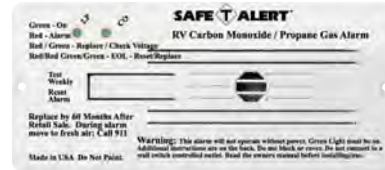

50002

Meets 5/1/2011 requirements set by
RVIA for CO alarms and Propane Detectors.

SAFE-T-ALERT LP GAS & CARBON MONOXIDE ALARM

- Meets 5/1/2011 requirements set by RVIA for CO alarms and Propane Detectors.
- Test/Reset Button - Mute alarm during ventilation. Tests both alarms functions with one touch. No dangerous gas required.
- Both alarms are fully operational during mute cycle and will re-alarm if hazardous conditions recur.
- Both sensors continue to work during an alarm.
- 12 Volt - Hard Wired Model prevents accidental disconnection.
- UL listed for Recreational Vehicles and Unconditioned Areas for both Carbon Monoxide and Propane.

35 Series Dual Carbon Monoxide & Propane Gas Alarm Specifications:

- Dual UL Listing Propane - UL 1484 RV Gas Detectors.
- UL Listing Carbon Monoxide UL 2034 RV Carbon Monoxide Alarms.
- CSA Listed.
- Supply and Current Draw 12 vDC 108 mA @ 12 vDC.
- Operational Voltage: 12 Volt +/- 15% - Low voltage power warning alarm @ 7 volts.
- Case Size - 6.375"W x 2.875"H x 1.25"D - Fits Safe-T-Alert Model 30-442 Cut Out.

Dual Alarm, LP Gas & CO Alarm:

50002 Brown #35-742-BRN 12

50001 White #35-742-WH 12

SAFE-T-ALERT 30 SERIES CLASSIC LP GAS DETECTORS

Features include: Intelcheck Circuit eliminates false alarms caused from momentary exposure to LP Gas, aerosol cleaners, hair spray and other flammable gases. Long life, self cleaning sensor. Micro circuit technology saves precious battery power. 46 milliamp (.046 amp.) current draw. • Meets RV standard ANSI A119.2 as required by the RVIA. Loud 85dB alarm alerts you to the presence of LP Gas and Natural Gas. • Test/Reset button can be used to temporarily silence alarm during ventilation. Tests all detector functions with one touch. No dangerous gas required. • Alarm is fully operational during mute cycle and will realarm if hazardous conditions recur. • Built for the extreme RV environment. • Power 12 VDC, operational range 8-16 volts. Operational temperature range: -40°F to +150°F (-40°C to +66°F). • UL listed for recreational vehicles and unconditioned areas to detect LP gas/ propane and natural gas. • 1-yr. limited warranty.

Recess Case 6.5"W x 2.875"H x 1.25" D:

57461 Almond #30-442-P-AL 12

57462 Brown #30-442-P-BR 12

56870 White #30-442-P-WT 6



SAFE-T-ALERT MINI SERIES LP GAS ALARM

Meets requirements set by RVIA for LP Gas Alarms on RVs. Features: • Test/Reset Button - mute alarm during ventilation. Tests all detector functions with one touch. No dangerous test gas required. • Wide operational range, 8 to 16 volts avoids most low voltage alarms. • Alarm is fully operational during mute cycle and will re-alarm if hazardous conditions recur. • Easy quick slide installation on mounting bracket. • Built for the extreme RV environment. UL listed for Recreational Vehicles and Unconditioned Areas. • One Year Limited Warranty.

- Operating temperature: -31°F to +150°F.
- Surface mount: 3.5" W x 2.5" H x 1.25" D.
- Power supply and current draw: 12-vDC, 75mA. Alarm Point: <25% LEL of propane and methane.

57256 Mini Propane Alarm, White
#20-441-P-WT 12



57006

Atwood



ATWOOD CO GAS ALARM

Easy to read digital display clearly indicates CO levels. The Atwood Battery Powered CO Alarm incorporates sophisticated electronic components to protect family members from the dangers of Carbon Monoxide. Updates CO level readout every 15 seconds. Uses 3 "AA" batteries (not included). 5.5" x 1.625".

Digital Display Model (Shown):

57006 CO Alarm #32519 1

Non-Digital Display Model:

56988 CO Alarm #32521 10

LEAK & SMOKE DETECTORS

LP GAS

K

In Section K:	Alarms & Leak Detectors	LP Tanks & Accessories	Valves & Fittings	Regulators	Pigtails & Hoses
---------------	-------------------------	------------------------	-------------------	------------	------------------



57475



57476

SAFE-T-ALERT DUAL CO / GAS ALARM WITH RELAY

70 SERIES - DUAL PROPANE/LP AND CARBON MONOXIDE ALARM

Combination Carbon Monoxide/LP Gas Alarm Kit with Relay value control and Solenoid valve. Sounds an alarm and turns your gas supply off a propane leak is detected. Also detects carbon monoxide fumes and sounds an alarm. The dual alarm kit replaces CCI Controls flush and surface mount Pre Tell LP Gas Detectors with valve control. • Meets requirements set by RVIA for new RV's requiring both propane detectors and CO alarms. • Also detects Compressed Natural Gas (CNG)/Methane. • Includes 3 amp relay to control solenoid valve to halt gas flow or shut down a generator during an alarm. • Interconnect up to 9 alarms. • Test/Reset button. • Resets and mutes alarm while safety and corrective actions are taken. • Fully operational during mute cycle. • 12V hard wired model. • Built for the extreme RV environment. 1-year limited warranty. • UL listed for RVs and unconditioned areas. • Power supply and current draw 12 vDC 132 mA; optional relay 12 vDC - 3 amp. • Operational voltage: 12V +/- 15% - Low voltage power warning alarm @ 7 volts. • Case size: 6.375" W x 3.5" H x 1.385" D.

Combination CO/LP Gas Alarm Kit with Relay:

57476 Brown #70-742-R-BR-KIT 12

57475 White #70-742-R-WT-KIT 12



MARSHALL EXCELSIOR LOW PRESSURE TEST KIT

Non-adjustable permanent gauge kit with case. Capacity: 0 - 35" WC. Rubber hose with bell.

57457 Non-Adjustable Low Pressure Test Kit (Gauge, Hose, Case) #ME50P-2 4



SAFE-T-ALERT CARBON MONOXIDE DETECTORS

Meets Recreational Vehicle and Residential UL Standard 2034, plus it has a special recognition circuit that requires the occupant to respond to the **85db alarm at 10 feet** by pressing the reset switch. Because disorientation and confusion are common effects of CO poisoning, the detector makes a further effort to make the occupants properly respond to the alarm. Unit also retains the level of CO detected at the time of alarm. When you ventilate the area after an alarm it is impossible to determine how much CO was present unless your detector has a memory. This important tool eliminates guess work for you, service personnel and emergency responders. Also has a warning alarm that will activate within 4 hours after a constant exposure to 60ppm of carbon monoxide. Detector features include: audible and visual malfunction alarms, double check confirmation circuit that will sound if CO is still present 6 minutes after the first indication of CO, fast installation and a circuit board that's never exposed. Case size (surface): 5 1/2" x 3" x 1 1/3"; (flush): 6 1/2" x 3 1/2" x 1 1/4". 12VDC. Current draw: 60 milliamps.

Safe-T-Alert CO Detector:

50883 Surface Mount #65-541-WT 6

50884 Recess Mount #65-542-WT 6



SAFE-T-ALERT 40 SERIES-The RVers Choice LP GAS ALARM


Designed for the Rugged RV Environment. Ideal for Class A Motor Homes, Class B Van Campers, Class C Mini-Motor Homes, Travel Trailers, Fifth Wheels, Truck & Folding Campers. – **Fully Operational During Mute.** Mute does not override detection circuit, giving you full time protection. – **InteleCheck™ Circuit** - No false alarms from temporary exposures to LP Gas/Propane, aerosol cleaners, hair spray and other flammable gases. – **Micro Current Technology.** Saves precious battery power. – **Long Life, Self Cleaning Sensor.** Maintenance free built-in sensor. – **Loud 85dB Alarm.** Alerts you to the presence of hazardous propane vapors. – **Test/Reset Button.** Used to temporarily silence alarm during ventilation. Tests all the detectors functions with one touch. – Operates on 12VDC. – Dimensions: 4.8"W x 3.4"H x 1/4"D. – **3 Year Limited Warranty.**

50886 Recess Mount
#40-442-P-WT 6

STAY ALERT WHILE RV'ING


SAFE-T-ALERT™ THE RVING CHOICE!

Potential sources of carbon monoxide

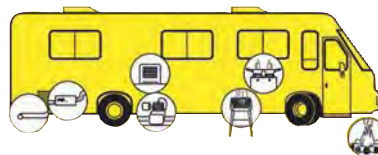

- Engine Exhaust • Portable Grills
- Portable Space Heaters • Camp Fires
- Gas Stoves and Ovens • Other RVs
- Defective Engine • Portable Generator
- Exhaust System • Generator Exhaust

Potential sources of lp gas leak sources

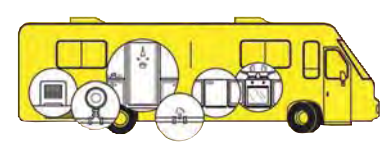

- Stove top burners • Refrigerator
- Oven • Other Propane Appliances
- Furnace • Defective LP Gas Connection
- Water Heater • Defective Regulator

As part of a running change; new part numbers:

Underwriters Laboratories (UL®) recently changed the operational requirements of both UL1484 Propane and UL2034 Carbon Monoxide Alarms. An "End-of life" Signal is now required to be part of the operational design.

The "end-of-life feature" circuit signals the end of the useful life of both Propane and CO alarms (about five years of useful life). The units will sound and also flash Red-Red, Green-Green. The units can be reset for a month, after that the unit will continue the signal and sound until they are removed. The alarms cannot be repaired and must be replaced.

There is no change in the physical appearance of any model. A new EOL signal explanation is hot stamped next to the LED's on the case. Simply the manufacturer's part numbers will change.

Models affected are series 20-441 (to 20-441-P), 30-441 (to 30-441-P), 30-442 (to 30-442-P), 40-441 (to 40-441-P), 40-442 (to 40-442-P), 60-541 (to 65-541) and 60-542 (to 65-442).

In Section K:

Alarms & Leak Detectors

LP Tanks & Accessories

Valves & Fittings

Regulators

Pigtails & Hoses

MTI INDUSTRIES SAFE-T-ALERT™ COMBINATION CARBON MONOXIDE AND PROPANE ALARM

Double your protection by replacing your old propane alarm with



one that detects two threats to your family's safety. Dual Alarm detects both carbon monoxide and propane gas inside an RV. Also detects CNG. 12-volt installation replaces current propane alarms in all RVs. Flush mount design saves space. 6.5" W x 3.5" H x 1.4" D. Test/Reset button. Mute alarm during ventilation. Test with one touch; no dangerous gas required. UL listed to operate at extreme temperatures (-40°F to +150°F) to detect both gases. No false alarm sensor technology. Operational down to 7-volts. 5-yr. mfr. warranty.

57047 Combination Carbon Monoxide and Propane Alarm #70-742RV 1



30 SERIES SLIM LINE LP GAS ALARM



UL® listed for RV use. The Slim Line surface mount case eliminates cutouts. A dual Test and Mute switch checks the alarm's functions and can silence the audible alarm for two minutes. During the mute cycle the sensing circuit is continually operating giving you constant protection. Only 6" W x 2" H x 2" D. The 30-441 operates on 12 VDC battery power. One year limited manufacturer's warranty. Light gray.

56914 Slim Line LP Gas Alarm #30-441-P-WT 12

SAFE-T-ALERT™



SAFE-T-ALERT SMOKE ALARM WITH SILENCER



• Press alarm Mute button to silence alarm while smoke is cleared. • Easy to install. • 9 volt battery included. • Dim.: 4.25" diameter x 1" deep. • Meets RVIA / ANSI standards for smoke alarms installed in RV's. • UL listed. • Retail packaging.

57479 Smoke Alarm with Silencer #SA-775 24

KIDDE BATTERY OPERATED IONIZATION SMOKE DETECTORS

Kidde Fyrenetics battery operated smoke alarms require no wiring and include all batteries necessary for operation. Suitable for installation on walls or ceilings in all rooms. **Features:**


- Ionization sensor. • Low battery indicator. • Test button. • 9V battery powered. • Flashing red LED power on indicator. • Piercing 85dB alarm horn. • Low profile design. • UL listed.

50726 Kidde 0914 Micro Smoke Detector (Not for sale in Canada) #0914E 12


MODEL 0915

In addition to all the features of the 0914, the 0915 also has a tamper proof locking pin and a 5-yr. mfr. warranty.

50480 Kidde 0915 Smoke Detector (Not for sale in Canada) #0915E 12

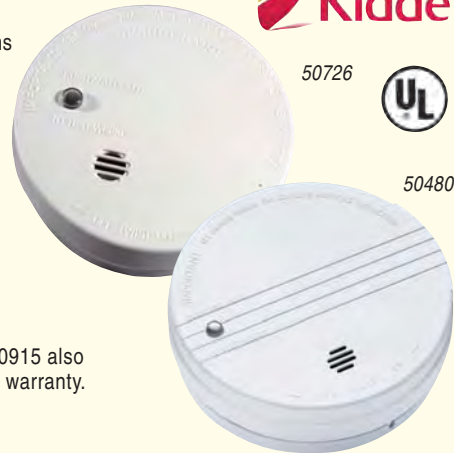

KIDDE BATTERY OPERATED CARBON MONOXIDE ALARM

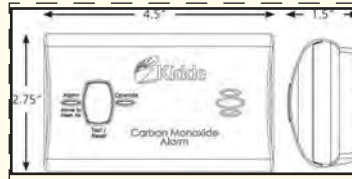

The Kidde 9CO5-LP battery operated carbon monoxide alarm utilizes sophisticated electronic components to protect you and your family from the dangers of carbon monoxide. This alarm includes a slide-out battery door that gives immediate access to the batteries and a safety feature that makes it difficult to close the door without the batteries being installed. Inside cover of battery door features quick reference guide for what to do in case of an alarm. This easy-to-install alarm is suitable for all living areas and has a 7-year life and a 5-year limited warranty. **Features:**

- Battery Operated (3AA's included). • Battery Lockout System. • Slide-out Battery Door Cover. • Test/Reset Button (C). • Low Battery Signal. • Green LED (A). • Red LED (B). • UL listed. • 5-yr. mfr. warranty.

57614 Kidde Battery Operated Carbon Monoxide Alarm #21008872 3

OPD PROPANE GAS TANKS

DOT certified propane cylinders contain a stopfill valve and OPD. Powder coated.

50623 20 lb. DOT Tank, (5 gal.), 12" Dia.; 18" O.L.; 18 lb. empty (ACME, without gauge) #YSN201 1

50617 30 lb. DOT Tank, (7.5 gal.) 12" Dia.; 24" O.L.; 25 lb. empty (ACME, without gauge) #YSN301 48

50618 40 lb. DOT Tank, (10 gal.) 12" Dia.; 30" O.L.; 36 lb. empty (ACME, without gauge) #YSN401 24

50623

50617




HONG'S® HENG'S PROPANE TANK STRAPS

Safely secures propane tanks in RVs.

Gas Bottle Strap:

50645 Single #90032 25

50646 Double #90033 25



STROMBERG CARLSON SINGLE LP GAS BOTTLE RACK

50489 20 lb. "J" Rack #2020-JR 5

